

Surge Protection Device

- Video equipment protection
- Extremely easy to use
- Small dimensions
- Video signal wire and coaxial cable shield surge discharge to the ground
- Direct connection on BNC video OUT/video IN sources



Surge protection device that protects Video Equipment against induced transients from voltage surges. The ground discharge is guaranteed both for video signal wire and coaxial cable shield. Video/IN BNC (female) and Video/OUT BNC (male) for easy connection to video source.


Video protection suitable for all equipments with BNC connection: Camera, Dome, Mux, Matrix, Digital Equipments, Monitor, etc. For a correct operation, the ground connection must be established at the same point of the video appliance grounding.

TECHNICAL SHEET **VERSIONS**


Raw material Anticorodal
Peak pulse 1500W/1ms
Response time 1x10 sec
Operating temperature -55 C +75 C
Protection IP44
Weight 35 gr
Dimensions W 60 x H 22 (38) x L 15 mm
 (BNC included)

Product sheets and availability subject to change without prior notice.
 © 2012, SERINN snc. Tutti i diritti riservati.


SPD2W Surge protection device

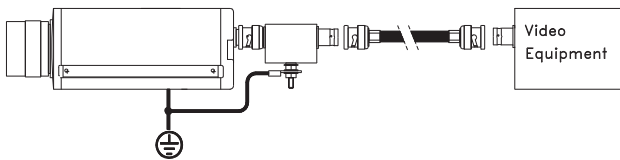

camera protection only

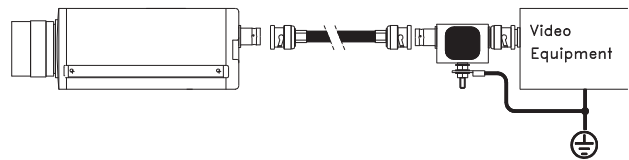

video IN protection only

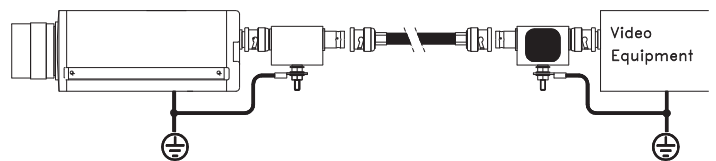

total line (equipments) protection