

TECHNICAL SHEET

External dimensions (W x H x L - mm)	58x40x16
Material	Anticorodal
Peak pulse	1500w/1ms
Response time	1x10 ⁻¹² sec.
Operating temperature	-55°c ÷ +75°c



Surge protection device
SPD2W

INSTRUCTION GUIDE



DISPOSAL OF YOUR OLD PRODUCT


Your product is designed and manufactured with high quality materials and component, which can be recycled and reused. When this crossed-out wheeled bin symbol is attached to a product it means the product is covered by the european directive 2002/96/ec. Please inform yourself about the local separate collection system for electrical and electronic products. Please act according to your local rules and do not dispose of your old products with your normal household waste. The correct disposal of your old product will help prevent potential negative consequences for the environment and human health.




BEFORE INSTALLATION AND OPERATION, PLEASE READ THESES INSTRUCTIONS CAREFULLY.

Dear customer
we thank you for choosing our product.
Before installation and operation please read these instructions carefully.

AVVISI DI PERICOLO E SICUREZZA

- 

This warning symbol means danger. You are in a situation that could cause bodily injury. Before you work on any equipment, be aware of the hazards involved with electrical circuitry and be familiar with standard practices for preventing accidents. **Before operating the machine, switch the power off.**
- 

This warning symbol means that operating instructions and precautions **must be carefully followed in order to avoid bodily injury and equipment damage.**


PRECAUZIONI ED AVVISI IMPORTANTI PER LA TUTELA DI BENI E PERSONE

- ⚠ Installation must be done by **qualified service person and must be conformed to all local codes.**
- ⚠ **Installation and tools must be in compliance with the property and person security rules:** particular attention must be applied to the use destinations and working limitations.
- ⚠ To prevent risk of fire or electric shock, **do not expose this unit to rain or moisture.**


PRODUCT DESCRIPTION

Surge protection device to protect video equipments against induced transients from voltage surges. The discharge to ground is guarantee **for both video wire and the shield of coaxial cable**. Complete with BNC female/IN and BNC male/OUT. **Note: for a corrected operation to carry out the ground connection to the same point used for grounding video equipments.**

Camera protection only

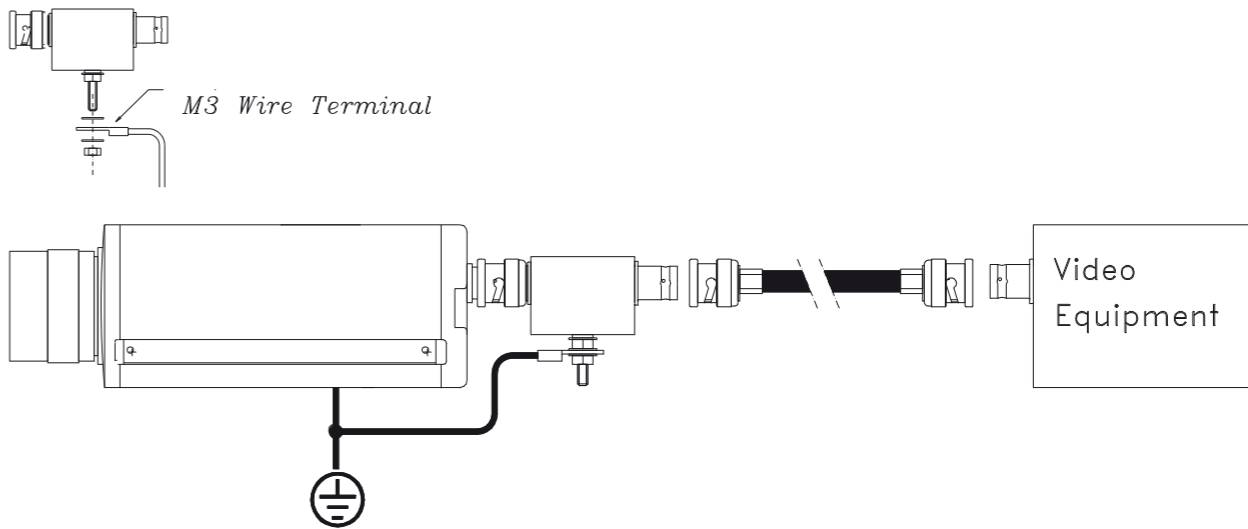

Monitor, matrix, multiplexer, videorecorder, etc. video IN protection only

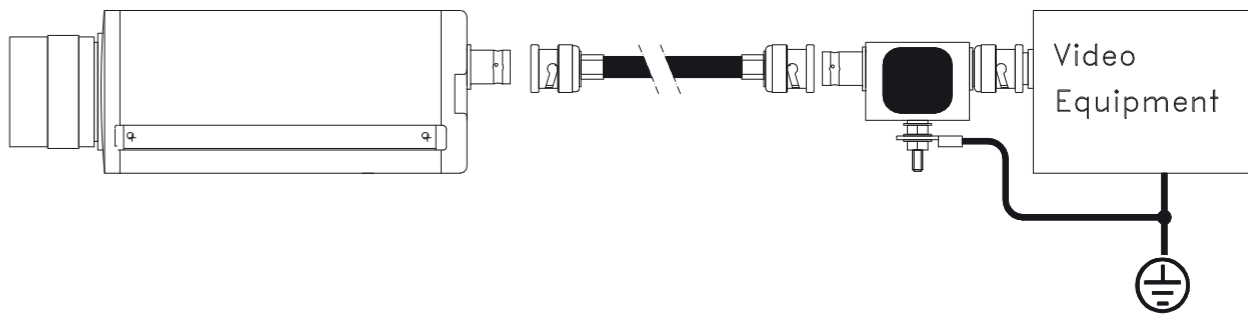

Full link-video device protection

